

7. The Laplace transform

- the Laplace transform
- properties of the Laplace transform
- solving differential equations
- circuit analysis using Laplace transform

The Laplace transform

the *Laplace transform* of $x(t)$ is defined as

$$X(s) = \int_{-\infty}^{\infty} x(t)e^{-st} dt$$

- variable s can be complex
- known as the *bilateral* or *two-sided* Laplace transform
- $x(t)$ is called the *inverse Laplace transform* of $X(s)$
- we use $x(t) \iff X(s)$ to denote a Laplace transform pair

Region of convergence (ROC)

- set of values of s where $X(s)$ exists is called the *region of convergence* (ROC)
- for a finite-duration, integrable signal $x_f(t)$, the ROC is the entire s -plane

Example 7.1

find the Laplace transform and the ROC for

(a) $x(t) = e^{-at}u(t)$

(b) $x(t) = -e^{-at}u(-t)$

Solution:

(a)

$$X(s) = \int_{-\infty}^{\infty} e^{-at}u(t)e^{-st} dt = \int_0^{\infty} e^{-(s+a)t} dt = -\frac{1}{s+a} e^{-(s+a)t} \Big|_0^{\infty}$$

for a complex number $z = \alpha + j\beta$

$$e^{-zt} = e^{-(\alpha+j\beta)t} = e^{-\alpha t} e^{-j\beta t}$$

since $|e^{-j\beta t}| = 1$, as $t \rightarrow \infty$, $e^{-zt} \rightarrow 0$ only if $\alpha > 0$, and $e^{-zt} \rightarrow \infty$ if $\alpha < 0$

we conclude that

$$\lim_{t \rightarrow \infty} e^{-(s+a)t} = \begin{cases} 0 & \operatorname{Re}(s+a) > 0 \\ \infty & \operatorname{Re}(s+a) < 0 \end{cases}$$

hence,


$$X(s) = \frac{1}{s+a} \quad \text{if } \operatorname{Re} s > -a$$

the ROC is $\operatorname{Re} s > -a$

(b)

$$\begin{aligned} X(s) &= \int_{-\infty}^{\infty} -e^{-at} u(-t) e^{-st} dt = - \int_{-\infty}^0 e^{-(s+a)t} dt \\ &= \frac{1}{s+a} e^{-(s+a)t} \Big|_{-\infty}^0 = \frac{1}{s+a} \quad \operatorname{Re} s < -a \end{aligned}$$

we see that $e^{-at}u(t)$ and $-e^{-at}u(-t)$ have identical $X(s)$ but different ROC

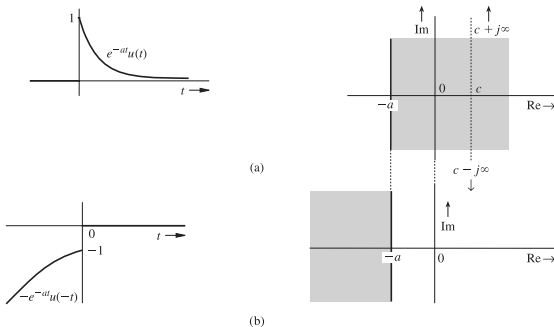

- $X(s)$ can have more than one inverse transform, depending on the ROC
- if we consider causal signals only, then there is a unique inverse transform of $X(s) = 1/(s + a)$, namely, $e^{-at}u(t)$ and there is no need to worry about ROC

Unilateral Laplace transform

the *unilateral Laplace transform* $X(s)$ of a signal $x(t)$ is

$$X(s) = \int_{0^-}^{\infty} x(t)e^{-st} dt \quad (7.1)$$

- the 0^- in the lower limit means we can start the integration right before 0 as long as the integral converges (*e.g.*, to include impulse function)
- for a given $X(s)$, there is a *unique* unilateral inverse transform $x(t)$

Linearity: if

$$x_1(t) \iff X_1(s) \quad \text{and} \quad x_2(t) \iff X_2(s)$$

then

$$a_1x_1(t) + a_2x_2(t) \iff a_1X_1(s) + a_2X_2(s)$$

Existence

the unilateral Laplace transform exists if there exists a real σ such that:

$$\int_{0^-}^{\infty} |x(t)e^{-\sigma t}| dt < \infty$$

- if $|x(t)| \leq Me^{\sigma_0 t}$ for some M and σ_0 , then $X(s)$ exists for $\sigma > \sigma_0$
- e^{t^2} grows at a rate faster than $e^{\sigma_0 t}$; hence not Laplace-transformable

Abcissa of convergence: the smallest value of σ , denoted by σ_0 , for which the integral is finite, is called the *abscissa of convergence*

- the ROC of $X(s)$ is $\operatorname{Re} s > \sigma_0$
- the abscissa of convergence for $e^{-at}u(t)$ is $-a$ (ROC is $\operatorname{Re} s > -a$)

Inverse Laplace transform

the *inverse Laplace transform* of $X(s)$ is

$$x(t) = \frac{1}{2\pi j} \int_{c-j\infty}^{c+j\infty} X(s)e^{st} ds$$

- c is a constant chosen to ensure convergence
- integration in the complex plane is beyond the scope of this course
- we will use known Laplace transform pairs to find the inverse transform

Notation: the Laplace and inverse Laplace operations are denoted by:

$$X(s) = \mathcal{L}[x(t)] \quad \text{and} \quad x(t) = \mathcal{L}^{-1}[X(s)]$$

note that

$$\mathcal{L}^{-1}\{\mathcal{L}[x(t)]\} = x(t) \quad \text{and} \quad \mathcal{L}\{\mathcal{L}^{-1}[X(s)]\} = X(s)$$

Common Laplace transform pairs

$x(t)$	$X(s)$
$\delta(t)$	1
$u(t)$	$\frac{1}{s}$
$tu(t)$	$\frac{1}{s^2}$
$t^n u(t)$	$\frac{n!}{s^{n+1}}$
$e^{\lambda t} u(t)$	$\frac{1}{s - \lambda}$
$te^{\lambda t} u(t)$	$\frac{1}{(s - \lambda)^2}$
$\cos(bt)u(t)$	$\frac{s}{s^2 + b^2}$
$\sin(bt)u(t)$	$\frac{b}{s^2 + b^2}$

(see Laplace table for more pairs)

Finding inverse Laplace of rational functions

if $X(s)$ is as a rational function, then

$$X(s) = \frac{P(s)}{Q(s)} = \frac{b_0s^M + b_1s^{M-1} + \dots + b_{M-1}s + b_M}{(s - p_1)(s - p_2) \dots (s - p_N)}$$

- $X(s)$ is called *proper* if $M < N$ and *improper* if $M \geq N$
- *zeros* of $X(s)$ are values of s for which $X(s) = 0$ (e.g., $P(s) = 0$)
- *poles* of $X(s)$ are values of s for which $X(s) \rightarrow \infty$ (e.g., $Q(s) = 0$)
- we can obtain $x(t)$ from known pairs given the partial-fraction expansion of $X(s)$, which expresses $X(s)$ as a sum of fractions with simpler denominator
- the ROC is the region of s -plane to the right of all the finite poles of $X(s)$

Partial fraction expansion

Distinct roots: if roots p_i of $Q(s)$ are distinct, then

$$X(s) = \frac{P(s)}{Q(s)} = \frac{k_1}{s - p_1} + \frac{k_2}{s - p_2} + \cdots + \frac{k_n}{s - p_n}$$

Repeated roots: if the root $p_n = \hat{p}$ of $Q(s) = 0$, is repeated r times, then

$$X(s) = \frac{P(s)}{Q(s)} = \frac{\hat{k}_1}{(s - \hat{p})} + \frac{\hat{k}_2}{(s - \hat{p})^2} + \cdots + \frac{\hat{k}_r}{(s - \hat{p})^r} \\ + \frac{k_1}{s - p_1} + \frac{k_2}{s - p_2} + \cdots + \frac{k_{n-r}}{s - p_{n-r}}$$

- only a proper rational function can be expanded as a sum of partial fractions
- improper $X(s)$ is separated it into a sum of a polynomial in s and a proper function

Example 7.2

find the inverse unilateral Laplace transforms of the following Laplace transforms

$$(a) X(s) = \frac{7s - 6}{s^2 - s - 6} \quad (\text{real distinct roots})$$

$$(b) X(s) = \frac{2s^2 + 5}{s^2 + 3s + 2} \quad (\text{improper } M = N)$$

$$(c) X(s) = \frac{6(s + 34)}{s(s^2 + 10s + 34)} \quad (\text{complex distinct roots})$$

$$(d) X(s) = \frac{8s + 10}{(s + 1)(s + 2)^3} \quad (\text{repeated roots})$$

Solution: we expand these functions into partial fractions

(a)

$$X(s) = \frac{7s - 6}{(s + 2)(s - 3)} = \frac{k_1}{s + 2} + \frac{k_2}{s - 3}$$

we have

$$k_1 = \frac{7s - 6}{\cancel{(s + 2)}(s - 3)} \Big|_{s=-2} = \frac{-14 - 6}{-2 - 3} = 4$$

$$k_2 = \frac{7s - 6}{(s + 2)\cancel{(s - 3)}} \Big|_{s=3} = \frac{21 - 6}{3 + 2} = 3$$

therefore,

$$X(s) = \frac{7s - 6}{(s + 2)(s - 3)} = \frac{4}{s + 2} + \frac{3}{s - 3}$$

using the Laplace table (pair 5), we have

$$x(t) = \mathcal{L}^{-1} \left(\frac{4}{s + 2} + \frac{3}{s - 3} \right) = (4e^{-2t} + 3e^{3t}) u(t)$$

(b) $X(s)$ is an improper function with $M = N$; we can express $X(s)$ as:

$$X(s) = \frac{2s^2 + 5}{s^2 + 3s + 2} = \frac{2s^2 + 5}{(s+1)(s+2)} = 2 + \frac{k_1}{s+1} + \frac{k_2}{s+2}$$

where

$$k_1 = \frac{2s^2 + 5}{\cancel{(s+1)}(s+2)} \Big|_{s=-1} = \frac{2+5}{-1+2} = 7$$
$$k_2 = \frac{2s^2 + 5}{\cancel{(s+1)}(s+2)} \Big|_{s=-2} = \frac{8+5}{-2+1} = -13$$

therefore,

$$X(s) = 2 + \frac{7}{s+1} - \frac{13}{s+2}$$

from Laplace table (pair 2 and 5), we have

$$x(t) = 2\delta(t) + (7e^{-t} - 13e^{-2t})u(t)$$

(c)

$$\begin{aligned} X(s) &= \frac{6(s+34)}{s(s^2+10s+34)} = \frac{6(s+34)}{s(s+5-j3)(s+5+j3)} \\ &= \frac{k_1}{s} + \frac{k_2}{s+5-j3} + \frac{k_2^*}{s+5+j3} \end{aligned}$$

we have $k_1 = 6$ and k_2 and k_2^* of the conjugate terms must be conjugate:

$$k_2 = -3 + j4 = 5e^{j126.9^\circ}, \quad k_2^* = 5e^{-j126.9^\circ}$$

hence

$$X(s) = \frac{6}{s} + \frac{5e^{j126.9^\circ}}{s+5-j3} + \frac{5e^{-j126.9^\circ}}{s+5+j3}$$

from Laplace table (pairs 2 and 10b), we obtain

$$x(t) = [6 + 10e^{-5t} \cos(3t + 126.9^\circ)] u(t)$$

(c) *Alternative approach:* to avoid dealing with complex numbers, we express $X(s)$:

$$\begin{aligned} X(s) &= \frac{6(s+34)}{s(s^2+10s+34)} = \frac{k_1}{s} + \frac{As+B}{s^2+10s+34} \\ &= \frac{6}{s} + \frac{As+B}{s^2+10s+34} \end{aligned}$$

where $k_1 = 6$ is already determined from before

to find A , we multiply both sides by s and then let $s \rightarrow \infty$:

$$0 = 6 + A \implies A = -6$$

therefore,

$$\frac{6(s+34)}{s(s^2+10s+34)} = \frac{6}{s} + \frac{-6s+B}{s^2+10s+34}$$

to find B , we let s be any convenient value, say, $s = 1$, to obtain

$$\frac{210}{45} = 6 + \frac{B-6}{45} \implies B = -54$$

hence,

$$X(s) = \frac{6}{s} + \frac{-6s - 54}{s^2 + 10s + 34}$$

using table (pairs 2 and 10c) with

$$A = -6, B = -54, a = 5, c = 34, b = \sqrt{c - a^2} = 3$$

we have

$$r = \sqrt{\frac{A^2c + B^2 - 2ABa}{c - a^2}} = 10 \quad \theta = \tan^{-1} \frac{Aa - B}{A\sqrt{c - a^2}} = 126.9^\circ$$

therefore,

$$x(t) = [6 + 10e^{-5t} \cos(3t + 126.9^\circ)] u(t)$$

(d) for repeated roots, we expand as

$$X(s) = \frac{8s + 10}{(s + 1)(s + 2)^3} = \frac{k_1}{s + 1} + \frac{a_0}{(s + 2)^3} + \frac{a_1}{(s + 2)^2} + \frac{a_2}{s + 2}$$

where

$$k_1 = \frac{8s + 10}{\cancel{(s + 1)}(s + 2)^3} \Big|_{s=-1} = 2$$

$$a_0 = \frac{8s + 10}{(s + 1)\cancel{(s + 2)^3}} \Big|_{s=-2} = 6$$

$$a_1 = \left\{ \frac{d}{ds} \left[\frac{8s + 10}{(s + 1)\cancel{(s + 2)^3}} \right] \right\}_{s=-2} = -2$$

$$a_2 = \frac{1}{2} \left\{ \frac{d^2}{ds^2} \left[\frac{8s + 10}{(s + 1)\cancel{(s + 2)^3}} \right] \right\}_{s=-2} = -2$$

therefore,

$$X(s) = \frac{2}{s + 1} + \frac{6}{(s + 2)^3} - \frac{2}{(s + 2)^2} - \frac{2}{s + 2}$$

(d) *Alternative approach:* in this method, the simpler coefficients k_1 and a_0 are determined by the Heaviside “cover-up” procedure;

to determine the remaining coefficients, we use the clearing-fraction method:

$$\frac{8s + 10}{(s + 1)(s + 2)^3} = \frac{2}{s + 1} + \frac{6}{(s + 2)^3} + \frac{a_1}{(s + 2)^2} + \frac{a_2}{s + 2}$$

if we multiply both sides by s and then let $s \rightarrow \infty$, we eliminate a_1 :

$$0 = 2 + a_2 \implies a_2 = -2$$

therefore,

$$\frac{8s + 10}{(s + 1)(s + 2)^3} = \frac{2}{s + 1} + \frac{6}{(s + 2)^3} + \frac{a_1}{(s + 2)^2} - \frac{2}{s + 2}$$

a_1 can be determined by setting s equal to any convenient value, say, $s = 0$:

$$\frac{10}{8} = 2 + \frac{3}{4} + \frac{a_1}{4} - 1 \implies a_1 = -2$$

therefore, $X(s) = \frac{2}{s+1} + \frac{6}{(s+2)^3} - \frac{2}{(s+2)^2} - \frac{2}{s+2}$, and from table, we have

$$x(t) = [2e^{-t} + (3t^2 - 2t - 2)e^{-2t}] u(t)$$

Example 7.3: improper

If $X(s) = P(s)/Q(s)$ is improper, where the order of $P(s)$ is greater than or equal to the order of $Q(s)$, then $P(s)$ must be divided by $Q(s)$ successively until the result has a remainder whose numerator is of order less than its denominator

Example

$$X(s) = \frac{s^3 + 2s^2 + 6s + 7}{s^2 + s + 5}$$

we must perform the indicated division until we obtain a remainder whose numerator is of order less than its denominator; hence,

$$X(s) = s + 1 + \frac{2}{s^2 + s + 5}$$

taking the inverse Laplace transform:

$$x(t) = \frac{d\delta(t)}{dt} + \delta(t) + \mathcal{L}^{-1} \left[\frac{2}{s^2 + s + 5} \right]$$

the inverse transform of $2/(s^2 + s + 5)$ can be found using partial-fraction expansion

Partial fraction expansion via MATLAB

the MATLAB `residue` command can be used to find the partial fraction expansion

Example: use MATLAB and Laplace table, to determine the inverse Laplace transform of each of the following functions:

$$(a) X_a(s) = \frac{2s^2 + 5}{s^2 + 3s + 2}$$

```
>> num = [2 0 5]; den = [1 3 2];  
>> [r, p, k] = residue(num,den)  
r = -13  
7  
p = -2  
-1  
k = 2
```

hence

$$X_a(s) = -13/(s+2) + 7/(s+1) + 2$$

$$x_a(t) = (-13e^{-2t} + 7e^{-t})u(t) + 2\delta(t)$$

$$(b) X_b(s) = \frac{2s^2 + 7s + 4}{(s+1)(s+2)^2}$$

```
>> num = [2 7 4]; den = [conv([1 1],conv([1 2],[1 2]))];  
>> [r, p, k] = residue(num,den)  
r = 3  
2  
-1  
p = -2  
-2  
-1  
k = []
```

hence,

$$X_b(s) = 3/(s+2) + 2/(s+2)^2 - 1/(s+1)$$

$$x_b(t) = (3e^{-2t} + 2te^{-2t} - e^{-t}) u(t)$$

$$(c) X_c(s) = \frac{8s^2 + 21s + 19}{(s+2)(s^2 + s + 7)}$$

```
>> num = [8 21 19]; den = [conv([1 2],[1 1 7])];
>> [r, p, k]= residue(num,den)
r = 3.5000-0.48113i
3.5000+0.48113i
1.0000
p = -0.5000+2.5981i
-0.5000-2.5981i
-2.0000
k = []
>> ang = angle(r), mag = abs(r)
ang = -0.13661
0.13661
0
mag = 3.5329
3.5329
1.0000
```

$$X_c(s) = \frac{1}{s+2} + \frac{3.5329e^{-j0.13661}}{s+0.5-j2.5981} + \frac{3.5329e^{j0.13661}}{s+0.5+j2.5981}$$

$$x_c(t) = \left[e^{-2t} + 1.7665e^{-0.5t} \cos(2.5981t - 0.1366) \right] u(t)$$

Finding the Laplace transform using Matlab

MATLAB's symbolic math toolbox can be used to find the Laplace transform

Examples

- (a) the direct unilateral Laplace transform of $x_a(t) = \sin(at) + \cos(bt)$

```
>> syms a b t; x_a = sin(a*t)+cos(b*t);
```

```
>> X_a = laplace(x_a);
```

```
X_a = a/(a^2 + s^2) + s/(b^2 + s^2)
```

we express in standard rational form

```
>> X_a = collect(X_a)
```

```
X_a = (a^2*s+a*b^2+a*s^2+s^3)/(s^4+(a^2 + b^2)*s^2+a^2*b^2)
```

- (b) the inverse unilateral Laplace transform of $X_b(s) = as^2/(s^2 + b^2)$

```
>> syms a b s; X_b = (a*s^2)/(s^2+b^2);
```

```
>> x_b = ilaplace(X_b)
```

```
x_b = a*dirac(t) - a*b*sin(b*t)
```


Outline

- the Laplace transform
- **properties of the Laplace transform**
- solving differential equations
- circuit analysis using Laplace transform

Shifting

Time-shifting: if $x(t) \iff X(s)$ then for $t_0 \geq 0$,

$$x(t - t_0) \iff X(s)e^{-st_0}$$


- here $x(t)$ is causal, so $x(t - t_0)$ starts at $t = t_0$ (we often avoid this ambiguity by considering $x(t)u(t)$)
- holds only for $t_0 \geq 0$; if $t_0 < 0$, the signal $x(t - t_0)$ may not be causal

Frequency-shifting: if $x(t) \iff X(s)$ then

$$x(t)e^{s_0t} \iff X(s - s_0)$$

Example 7.4

find the Laplace transform of $x(t)$ shown below



Solution: we can express the signal as:

$$\begin{aligned}x(t) &= (t-1)[u(t-1) - u(t-2)] + [u(t-2) - u(t-4)] \\ &= (t-1)u(t-1) - (t-1)u(t-2) + u(t-2) - u(t-4)\end{aligned}$$

we can rearrange the second term as

$$(t-1)u(t-2) = (t-2+1)u(t-2) = (t-2)u(t-2) + u(t-2)$$

hence,

$$x(t) = (t-1)u(t-1) - (t-2)u(t-2) - u(t-4)$$

applying the time-shifting property to $tu(t) \iff 1/s^2$ yields

$$(t-1)u(t-1) \iff \frac{1}{s^2}e^{-s} \quad \text{and} \quad (t-2)u(t-2) \iff \frac{1}{s^2}e^{-2s}$$

also

$$u(t) \iff \frac{1}{s} \quad \text{and} \quad u(t-4) \iff \frac{1}{s}e^{-4s}$$

therefore,

$$X(s) = \frac{1}{s^2}e^{-s} - \frac{1}{s^2}e^{-2s} - \frac{1}{s}e^{-4s}$$

Example 7.5

find the inverse Laplace transform of

$$X(s) = \frac{s + 3 + 5e^{-2s}}{(s + 1)(s + 2)}$$

Solution: we have

$$X(s) = \underbrace{\frac{s + 3}{(s + 1)(s + 2)}}_{X_1(s)} + \underbrace{\frac{5e^{-2s}}{(s + 1)(s + 2)}}_{X_2(s)e^{-2s}}$$

and

$$X_1(s) = \frac{s + 3}{(s + 1)(s + 2)} = \frac{2}{s + 1} - \frac{1}{s + 2}$$

$$X_2(s) = \frac{5}{(s + 1)(s + 2)} = \frac{5}{s + 1} - \frac{5}{s + 2}$$

therefore,

$$x_1(t) = (2e^{-t} - e^{-2t}) u(t)$$

$$x_2(t) = 5(e^{-t} - e^{-2t}) u(t)$$

also, because

$$X(s) = X_1(s) + X_2(s)e^{-2s}$$

we can write

$$\begin{aligned} x(t) &= x_1(t) + x_2(t - 2) \\ &= (2e^{-t} - e^{-2t}) u(t) + 5 \left[e^{-(t-2)} - e^{-2(t-2)} \right] u(t - 2) \end{aligned}$$

Differentiation

Time-differentiation: if $x(t) \iff X(s)$ then

$$\frac{dx(t)}{dt} \iff sX(s) - x(0^-)$$

repeated differentiation yields


$$\begin{aligned} \frac{d^n x(t)}{dt^n} &\iff s^n X(s) - s^{n-1} x(0^-) - s^{n-2} \dot{x}(0^-) - \dots - x^{(n-1)}(0^-) \\ &= s^n X(s) - \sum_{k=1}^n s^{n-k} x^{(k-1)}(0^-) \end{aligned}$$

Frequency-differentiation: if $x(t) \iff X(s)$ then



$$t^n x(t) \iff (-1)^n \frac{d^n}{ds^n} X(s)$$

Example 7.6

find the Laplace transform of $x(t)$ using Laplace table and the time-differentiation and time-shifting properties

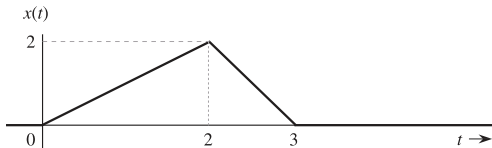

Solution: the derivative at a discontinuity is an impulse equal to the jump amount

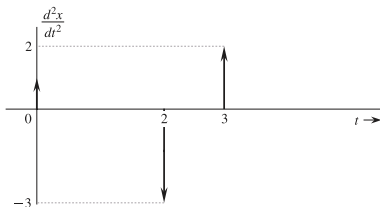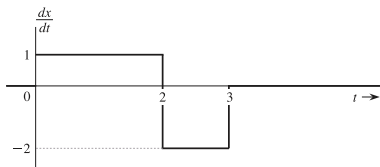

therefore,

$$\frac{d^2x(t)}{dt^2} = \delta(t) - 3\delta(t - 2) + 2\delta(t - 3)$$

the Laplace transform of this equation yields

$$\mathcal{L}\left(\frac{d^2x(t)}{dt^2}\right) = \mathcal{L}[\delta(t) - 3\delta(t - 2) + 2\delta(t - 3)]$$

using the time-differentiation and time-shifting properties, and the facts that $x(0^-) = \dot{x}(0^-) = 0$, and $\delta(t) \iff 1$, we obtain

$$s^2X(s) - 0 - 0 = 1 - 3e^{-2s} + 2e^{-3s}$$

thus,

$$X(s) = \frac{1}{s^2} (1 - 3e^{-2s} + 2e^{-3s})$$

Integration

Time-integration: if $x(t) \iff X(s)$ then

$$\int_{0^-}^t x(\tau) d\tau \iff \frac{X(s)}{s}$$

and

$$\int_{-\infty}^t x(\tau) d\tau \iff \frac{X(s)}{s} + \frac{\int_{-\infty}^{0^-} x(\tau) d\tau}{s}$$

Frequency-integration: if $x(t) \iff X(s)$ then

$$\frac{x(t)}{t} \iff \int_s^\infty X(u) du$$

Scaling and complex conjugation

Time-scaling: if $x(t) \iff X(s)$, then for $a > 0$

$$x(at) \iff \frac{1}{a} X\left(\frac{s}{a}\right)$$

- compression of $x(t)$ by a factor a causes expansion of $X(s)$
- expansion $x(t)$ causes compression of $X(s)$ by the same factor

Complex conjugation: if $x(t) \iff X(s)$, then

$$x^*(t) \iff X^*(s^*)$$

Convolution

let

$$x_1(t) \iff X_1(s) \quad \text{and} \quad x_2(t) \iff X_2(s)$$

Time-convolution

$$x_1(t) * x_2(t) \iff X_1(s)X_2(s)$$

Frequency-convolution

$$x_1(t)x_2(t) \iff \frac{1}{2\pi j} [X_1(s) * X_2(s)]$$

Example 7.7

use the time-convolution property of the Laplace transform to determine

$$c(t) = e^{at}u(t) * e^{bt}u(t)$$

Solution: using time-convolution property, we have

$$C(s) = \frac{1}{(s-a)(s-b)} = \frac{1}{a-b} \left[\frac{1}{s-a} - \frac{1}{s-b} \right]$$

the inverse transform of this equation yields

$$c(t) = \frac{1}{a-b} \left(e^{at} - e^{bt} \right) u(t)$$

Initial and final value theorems

Initial value theorem

$$x(0^+) = \lim_{s \rightarrow \infty} sX(s)$$

- applies only if $X(s)$ is strictly proper ($M < N$)
- for $M \geq N$, $\lim_{s \rightarrow \infty} sX(s)$ does not exist in such a case, we must express $X(s)$ as a polynomial in s plus a strictly proper fraction, where $M < N$

Final value theorem

$$\lim_{t \rightarrow \infty} x(t) = \lim_{s \rightarrow 0} sX(s)$$

applies only if the poles of $X(s)$ are in the LHP (including $s = 0$)

Example 7.8

determine the initial and final values of $y(t)$ if

$$(a) Y(s) = \frac{10(2s + 3)}{s(s^2 + 2s + 5)}$$

$$(b) Y(s) = \frac{s^3 + 3s^2 + s + 1}{s^2 + 2s + 1}$$

Solution:

(a) directly applying the theorems:

$$y(0^+) = \lim_{s \rightarrow \infty} sY(s) = \lim_{s \rightarrow \infty} \frac{10(2s + 3)}{(s^2 + 2s + 5)} = 0$$

$$y(\infty) = \lim_{s \rightarrow 0} sY(s) = \lim_{s \rightarrow 0} \frac{10(2s + 3)}{(s^2 + 2s + 5)} = 6$$

(b) here $M > N$, to use use the I.V.T, we write

$$Y(s) = (s + 1) - \frac{2s}{s^2 + 2s + 1}$$

the inverse transform of $s + 1$ is $\dot{\delta}(t) + \delta(t)$, which are zero at $t = 0^+$; hence:

$$y(0^+) = \lim_{s \rightarrow \infty} \frac{-2s^2}{s^2 + 2s + 1} = -2, \quad y(\infty) = \lim_{s \rightarrow 0} sY(s) = 0$$

Outline

- the Laplace transform
- properties of the Laplace transform
- **solving differential equations**
- circuit analysis using Laplace transform

Solving differential equations

Laplace transform is a powerful tool to analyze linear systems

- differential equations can be transformed into algebraic equations
- allows us to solve differential equations knowing only initial conditions at 0^-
using differential equations, we have to also know the initial conditions at 0^+

Example: use the Laplace transform to solve the linear differential equation

$$\frac{d^2y(t)}{dt^2} + 5\frac{dy(t)}{dt} + 6y(t) = \frac{dx(t)}{dt} + x(t)$$

with initial conditions $y(0^-) = 2$ and $\dot{y}(0^-) = 1$ and the input $x(t) = e^{-4t}u(t)$

Solution:

let $y(t) \iff Y(s)$, then

$$\frac{dy(t)}{dt} \iff sY(s) - y(0^-) = sY(s) - 2$$

$$\frac{d^2y(t)}{dt^2} \iff s^2Y(s) - sy(0^-) - \dot{y}(0^-) = s^2Y(s) - 2s - 1$$

moreover, for $x(t) = e^{-4t}u(t)$

$$X(s) = \frac{1}{s+4} \quad \text{and} \quad \frac{dx(t)}{dt} \iff sX(s) - x(0^-) = \frac{s}{s+4} - 0 = \frac{s}{s+4}$$

taking the Laplace transform of the diff. equation:

$$[s^2Y(s) - 2s - 1] + 5[sY(s) - 2] + 6Y(s) = \frac{s}{s+4} + \frac{1}{s+4}$$

rearranging, we obtain

$$(s^2 + 5s + 6)Y(s) - (2s + 11) = \frac{s + 1}{s + 4}$$

therefore,

$$Y(s) = \frac{2s + 11}{s^2 + 5s + 6} + \frac{s + 1}{(s^2 + 5s + 6)(s + 4)} = \frac{2s^2 + 20s + 45}{(s + 2)(s + 3)(s + 4)}$$

expanding the right-hand side into partial fractions:

$$Y(s) = \frac{13/2}{s + 2} - \frac{3}{s + 3} - \frac{3/2}{s + 4}$$

taking inverse Laplace transform:

$$y(t) = \left(\frac{13}{2}e^{-2t} - 3e^{-3t} - \frac{3}{2}e^{-4t} \right) u(t)$$

Zero-input and zero-state components

- the initial conditions term in the response give rise to the zero-input response
- the input term give rise to the zero-state response


Example: in the previous example, we have

$$Y(s) = \underbrace{\frac{2s + 11}{s^2 + 5s + 6}}_{\text{initial conditions term}} + \underbrace{\frac{s + 1}{(s + 4)(s^2 + 5s + 6)}}_{\text{input term}}$$
$$= \left[\frac{7}{s + 2} - \frac{5}{s + 3} \right] + \left[\frac{-1/2}{s + 2} + \frac{2}{s + 3} - \frac{3/2}{s + 4} \right]$$

taking the inverse transform:

$$y(t) = \underbrace{(7e^{-2t} - 5e^{-3t}) u(t)}_{\text{ZIR}} + \underbrace{\left(-\frac{1}{2}e^{-2t} + 2e^{-3t} - \frac{3}{2}e^{-4t} \right) u(t)}_{\text{ZSR}}$$


Example 7.9

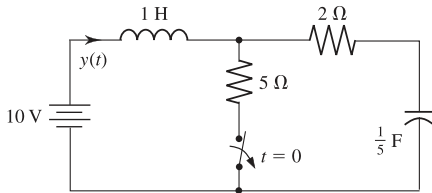

the switch is in the closed position for a long time before $t = 0$, when it is opened instantaneously; find the inductor current $y(t)$ for $t \geq 0$

Solution: when the switch is in the closed position (for a long time), we have $y(0^-) = 2$ and $v_C(0^-) = 10$

when the switch is opened ($t > 0$), we get the circuit

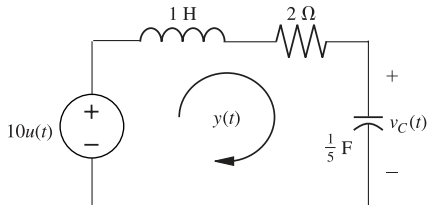

the voltage source is represented by a unit step $10u(t)$ after opening the switch

the loop equation of the circuit is

$$\frac{dy(t)}{dt} + 2y(t) + 5 \int_{-\infty}^t y(\tau) d\tau = 10u(t)$$

if $y(t) \iff Y(s)$ then

$$\frac{dy(t)}{dt} \iff sY(s) - y(0^-) = sY(s) - 2$$

and

$$\int_{-\infty}^t y(\tau) d\tau \iff \frac{Y(s)}{s} + \frac{\int_{-\infty}^{0^-} y(\tau) d\tau}{s}$$

note that $(1/C) \int_{-\infty}^{0^-} y(\tau) d\tau = v_C(0^-)$ and thus:

$$\int_{-\infty}^{0^-} y(\tau) d\tau = C v_C(0^-) = \frac{1}{5}(10) = 2$$

hence

$$\int_{-\infty}^t y(\tau) d\tau \iff \frac{Y(s)}{s} + \frac{2}{s}$$

using these results, the Laplace transform the diff. equation is

$$sY(s) - 2 + 2Y(s) + \frac{5Y(s)}{s} + \frac{10}{s} = \frac{10}{s}$$

thus

$$Y(s) = \frac{2s}{s^2 + 2s + 5}$$

to find the inverse Laplace transform, we use pair 10c in Laplace table with values $A = 2$, $B = 0$, $a = 1$, and $c = 5$:

$$r = \sqrt{\frac{20}{4}} = \sqrt{5}, \quad b = \sqrt{c - a^2} = 2 \quad \text{and} \quad \theta = \tan^{-1}\left(\frac{2}{4}\right) = 26.6^\circ$$

therefore,

$$y(t) = \sqrt{5}e^{-t} \cos(2t + 26.6^\circ) u(t)$$

Outline

- the Laplace transform
- properties of the Laplace transform
- solving differential equations
- **circuit analysis using Laplace transform**




Laplace representation of basic electric elements

Resistor

$$v(t) = Ri(t) \iff V(s) = RI(s)$$


Inductor

$$v(t) = L \frac{di(t)}{dt} \iff V(s) = LsI(s) - Li(0^-)$$



Capacitor

$$i(t) = C \frac{dv(t)}{dt} \iff V(s) = \frac{1}{Cs} I(s) + \frac{v(0^-)}{s}$$

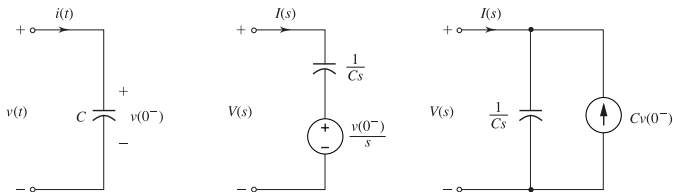

Impedance: the *impedance* of an element is $Z = V(s)/I(s)$

- the impedance of a resistor of R is $Z = R$
- the impedance of an inductor of L is $Z = Ls$
- the impedance of a capacitor C is $Z = 1/Cs$

Kirchhoff's laws

Time domain

$$\sum_{k=1}^N v_k(t) = 0 \quad \text{and} \quad \sum_{k=1}^M i_k(t) = 0$$


- $v_k(t)$ ($k = 1, 2, \dots, N$) are the voltages across N elements in a loop
- $i_k(t)$ ($k = 1, 2, \dots, M$) are the M currents entering a node

Laplace domain

$$\sum_{k=1}^N V_k(s) = 0 \quad \text{and} \quad \sum_{k=1}^M I_k(s) = 0$$

- $V_k(s)$ and $I_k(s)$ are the Laplace transforms of $v_k(t)$ and $i_k(t)$
- we can treat the network as if it consisted of the “resistances” R , Ls , $1/Cs$

Example

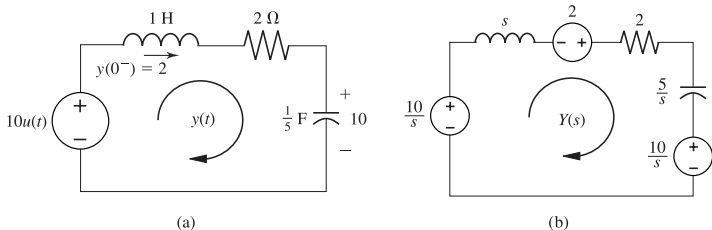


the initial conditions $y(0^-) = 2$ and $v_C(0^-) = 10$

loop voltage is $(10/s) + 2 - (10/s) = 2$, and loop impedance is $(s + 2 + (5/s))$;
hence,

$$Y(s) = \frac{2}{s + 2 + 5/s} = \frac{2s}{s^2 + 2s + 5}$$


which matches our earlier result in slide [7.46](#)

Example 7.10

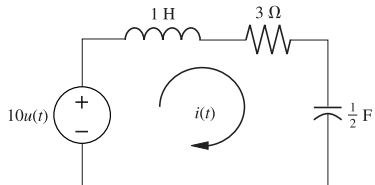

find the loop current $i(t)$ in the circuit shown if all the initial conditions are zero

Solution: we first, we represent the circuit in the frequency domain:



total impedance in the loop is

$$Z(s) = s + 3 + \frac{2}{s} = \frac{s^2 + 3s + 2}{s}$$


the input voltage is $V(s) = 10/s$; therefore:

$$\begin{aligned} I(s) &= \frac{V(s)}{Z(s)} = \frac{10}{s^2 + 3s + 2} \\ &= \frac{10}{(s+1)(s+2)} \\ &= \frac{10}{s+1} - \frac{10}{s+2} \end{aligned}$$

taking the inverse transform, we arrive at


$$i(t) = 10(e^{-t} - e^{-2t})u(t)$$

Example 7.11

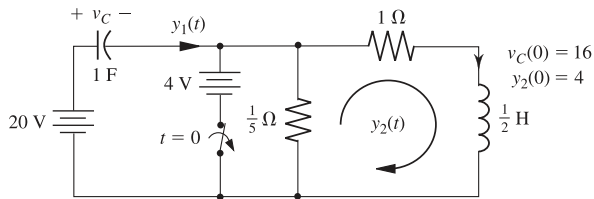

the switch in the circuit is in the closed position for a long time before $t = 0$, when it is opened instantaneously; find the currents $y_1(t)$ and $y_2(t)$ for $t \geq 0$

Solution: by inspection, the initial conditions are $v_C(0^-) = 16$ and $y_2(0^-) = 4$; thus for $t \geq 0$, the circuit in Laplace domain is

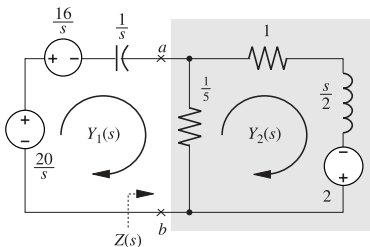

the loop equations can be written directly in the frequency domain as

$$\begin{aligned} \frac{Y_1(s)}{s} + \frac{1}{5} [Y_1(s) - Y_2(s)] &= \frac{4}{s} \\ -\frac{1}{5}Y_1(s) + \frac{6}{5}Y_2(s) + \frac{s}{2}Y_2(s) &= 2 \end{aligned}$$

solving, we get

$$Y_1(s) = \frac{24(s+2)}{s^2+7s+12} = \frac{24(s+2)}{(s+3)(s+4)} = \frac{-24}{s+3} + \frac{48}{s+4}$$

and

$$Y_2(s) = \frac{4(s+7)}{s^2+7s+12} = \frac{16}{s+3} - \frac{12}{s+4}$$


hence,

$$y_1(t) = (-24e^{-3t} + 48e^{-4t}) u(t)$$

$$y_2(t) = (16e^{-3t} - 12e^{-4t}) u(t)$$

Alternative solution: we use Thévenin's theorem to compute $Y_1(s)$ and $Y_2(s)$
the Thévenin impedance $Z(s)$ and the Thévenin source $V(s)$ (across right part of terminals ab) are

$$Z(s) = \frac{\frac{1}{5} \left(\frac{s}{2} + 1 \right)}{\frac{1}{5} + \frac{s}{2} + 1} = \frac{s + 2}{5s + 12}, \quad V(s) = \frac{-\frac{1}{5}}{\frac{1}{5} + \frac{s}{2} + 1} 2 = \frac{-4}{5s + 12}$$



the current $Y_1(s)$ is given by

$$Y_1(s) = \frac{\frac{4}{s} - V(s)}{\frac{1}{s} + Z(s)} = \frac{24(s + 2)}{s^2 + 7s + 12}$$

which matches our previous result (we can determine $Y_2(s)$ in a similar manner)

References

- B. P. Lathi, *Linear Systems and Signals*, Oxford University Press.